

REM® TCH-P SERIES PAPER TRANSFER CONVEYORS

The Model TCH-P Series Conveyor is another alternative for feeding paper products onto a sorting conveyor. This unit features a metering device (patent pending) utilizing a counter-rotating wheel with fingers that pushes excess material back down into the hopper. This device facilitates an even flow of paper on your sorting line, reducing the conveyor shutdowns due to paper clumps, or having too much material on the belt. The hopper sides are designed to allow the flow of paper onto the in feed conveyor minimizing bridging problems associated with other hoppers. You can feed the TCH-P with a front-end loader, rotating forklift forks, hydraulic lifts or push material from the floor into an in ground TCH-P.



Built tough for many years of service, the TCH-P is built with a classic slat bed design featuring a reinforced loading area for minimal belt deflection. We offer standard belt widths of 36" through 60" (in 6" increments), standard and custom lengths, inclines and discharge heights available in many configurations. The drive packages are sized for each particular application making material transfer effortless! Belt materials and variations are matched to your specific requirements. Bolt together modular conveyor sections (for conveyors longer than fifteen feet) allow for your future growth and expansion.



FEATURES

- Field-proven design for high volume, low maintenance, extended life, and easy service.
- Available in standard widths of 36" to 60" in 6" increments.
- Enclosed tail pulley cover with external take-ups for correct belt tracking and tension.
- Enclosed belt and chain guards for user protection.
- 2.5 cubic yard hopper.
- All-steel unitized construction.
- PVC-150 conveyor belting with 3" vulcanized cleats and Flexco 125 Megalloy lacing.
- 8" diameter head pulley and 6" diameter crowned tail Pulley.

DIMENSIONS	TCH-P6	TCH-P8	TCH-P10
Height (A)	6' 8"	7' 10"	9' 2"
Length (B)	9' 10"	11' 6"	13' 2"
Hopper Width (C)	6'	6'	6'
Loading Height (D)	5'	5'	5'
Discharge Height (E)	4' 6"	5' 9"	7'

Electrical

- 240/480 volt, three phase
- Electrical components are UL listed
- NEMA-3R (outdoor) enclosure
- Manual starter with thermal overload protection
- Individual motor overload/ short circuit protection

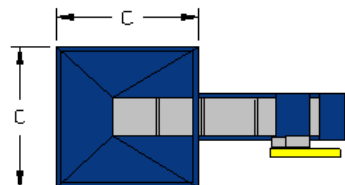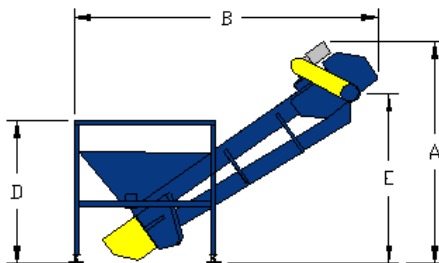

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only.