


## CAN CRUSHERS – REM® MODEL CC-10 EXT

**A complete separator, crusher and blower unit capable of processing up to 3,500 pounds of cans per hour.**

Equipped with a generous 24" wide belt and 3/4 cubic yard in feed hopper, cans are quickly conveyed across a powerful magnetic head pulley where ferrous separation occurs. A 16" diameter x 30" wide drum with hardened steel bars crushes the aluminum cans to a density of 6-7 lbs. per cubic foot. Our high performance blower will fill your 40-45' trailer in only a few hours!

Designed with the customer in mind, the EXT Crusher provides dependable, high volume performance with a minimal investment. Gain that "competitive edge" and maximize your profits. Put the new EXT to work for you today and see how efficient your operation can become.

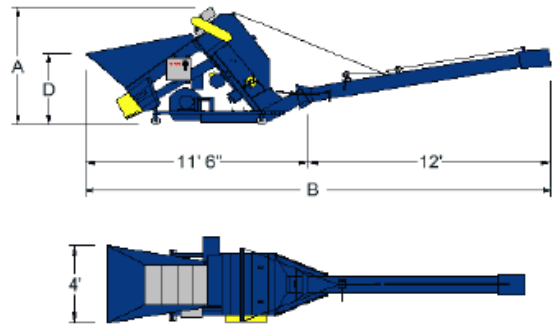

### FEATURES

- Processes up to 3,500 pounds of cans per hour
- Third generation field proven design for high volume, low maintenance, exten easy service
- Crusher drum has hardened steel cleats
- Hopper screen minimizes dirt, debris and moisture
- Enclosed tail pulley cover with external take-ups for correct belt tracking & ter
- REM® Magnetic head pulley for superior separation
- Low in-feed hopper for easy loading/visual inspection
- High performance blower to fill a 45' trailer
- Enclosed belt and chain guards for user protection
- Blow tube safety restraints

### SPECIFICATIONS

- All-steel unitized construction
- Density of 6-7 lbs. per cubic foot
- PVC-150 conveyor belting with 1-1/2" vulcanized cleats and Flexco 125 Megalloy Lacing
- 3/4 cubic yard in-feed hopper
- 10" diameter adjustable blow-tube with support cable and brake winch
- 8" diameter magnetic head pulley, and 6" diameter crowned tail pulley
- Reversible steel can side-discharge chute
- Enclosed sides and bottom of belt return pan
- 3/4 HP TEFC conveyor motor
- 10 HP crusher / 10 HP blower TEFC motors
- 8" industrial steel casters

CC-10 EXT	
Height (A)	7' 1"
Length (B)	23' 6"
Width (C)	48"
Loading Height (D)	51"
Approx. Weight (lbs)	2,600

### ELECTRICAL

- 240/480 volt, three phase
- Electrical components are UL listed
- NEMA-4 (hose proof) enclosure
- Sequential manual start motor controls
- Main safety fused disconnect
- Individual motor overload/short circuit protection
- Safety interlock on crusher access door

### OPTIONS

- 220 volt, single phase
- 208, 380, 415, 480, or 575 volt, three phase
- Power cord
- Custom conveyors and hoppers
- Replaceable cast chromium crusher drum cleats
- If you don't see it, ask us!

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only.