

## REM® SORTING CONVEYOR – SC SERIES

REM® SC Series Sorting Conveyors provide an affordable and convenient method for sorting and processing a wide range of recyclables.

**EASY TO USE** - Simply feed various materials onto the conveyor belt (optional hydraulic lift available for dumping containers, carts, boxes, etc.) and use the foot operated switch(es) to control the belt feed. REM® sorting conveyors increase worker productivity and improve product quality. They are quality built, with the same field proven design used in all of REM's® recycling machinery. SORTING CONVEYOR FOR SORTING OF MIXED PAPER, GLASS, OR PLASTICS




**DURABLE CONSTRUCTION** - Built tough for many years of service REM's® SC is built with a classic slat bed design featuring a reinforced loading area for minimal belt deflection. We offer standard belt widths of 30" through 60" (in 6" increments), standard and custom lengths, inclines, and discharge heights available in many configurations. REM's® drive packages are sized for each particular application making material transfer effortless! Belt materials and variations are matched to your specific requirements. Bolt together modular conveyor sections (for conveyors longer than fifteen feet) allow for your future growth and expansion, simply add a bolt-on section to extend your conveyor length and discharge height.

### FEATURES

- 30" wide heavy-duty PVC conveyor belt
- Foot operated belt feed
- All drive parts fully enclosed for safety
- Conveyor belt return fully enclosed
- Motor speed reducer and chain drive
- 4" casters for mobility
- Standard lengths in 5' increments
- 40 FPM belt speed (approx.)
- 12' power cord, 110v only

### SPECIFICATIONS

- All steel construction
- Motor hp: 1-1/2, 2, 3 depending on length
- Adjustable sorting heights from 36-44"

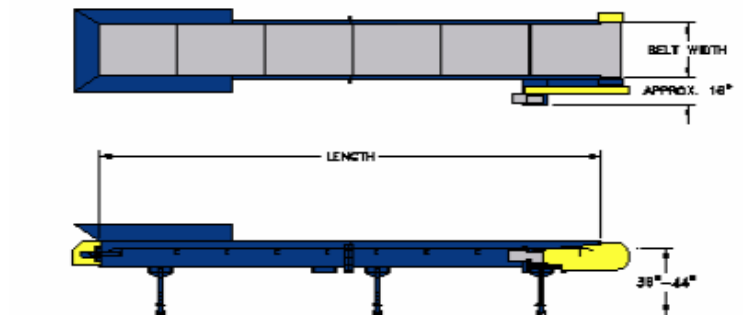

### ELECTRICAL SAFETY FEATURES

- 110, 208, 240, or 480v
- NEMA-3R (outdoor) enclosures
- Magnetic starter
- Overload protection
- One foot switch standard in 15' lengths and two on longer units

### OPTIONS

- Variable speed
- Power cord
- Custom widths up to 72" in 6" increments
- Custom lengths up to 100' in 5' increments
- Stainless steel pan insert for use with overhead magnet
- Foot switch start/stop variation

DIMENSIONS	15'	20'	25'
Height	36"-44" Adjustable	36"-44" Adjustable	36"-44" Adjustable
Length	16' 4"	21' 4"	26' 4"
Width	41"	41"	41"
Weight (approx.)	750 lbs	925 lbs	1100 lbs

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only.