

VERTICAL BALER

MODEL V63-865

This non-ferrous scrap baler produces more than 150,000 lbs. of compact force at more than 80 lbs. PSI of platen pressure. The 65" stroke cylinder provides maximum compaction, extending to within a few inches of the floor. Manufactured for tin, aluminum, brass, bronze, and other non-ferrous metals, it also bales paper, paper cores, plastics, and other recyclables.

Ideal for: • Grocery Stores • Home Retailers • Pharmacies • Big Box Retailers • National Accounts • Commissaries • Warehouses • Distribution Centers • Hospitals, Schools & Universities • Recyclers

PERFORMANCE

- **Nominal Bale Size** - 60" x 30" x 48"
- **Bale Weight** - Up to 2000 lbs OCC
- **Bale Volume** - 50 cu. ft.
- **No. of Bale Tie Slots** - 5
- **Compact Force lbs** - 150,798
- **Platen Pressure** - 84 PSI
- **Average Cycle Time** - 53 Seconds
- **Loading Height** – 53.5"
- **Ejector System** - Semi-Automatic



HYDRAULIC/ELECTRICAL


- **Power Unit (side mount is standard)** - 10HP Submersible - Dual Pump with Regen
- **Voltage** - 3 Phase, 208V, 230V, 480V
- **Full Load Amps** - 30A, 28A, 14A
- **Pump GPM** – 14/4 Dual Pump with Regen
- **Factory Set System Pressure PSI** - 3000
- **Cylinder Bore x Stroke** - 8" x 65"
- **Hydraulic Tank-Capacity Gallons** - 60

AVAILABLE OPTIONS

- Slotted Front Door
- Wire Guides (allows for front bale tie-off)
- Feed Chute
- Counter Weighted Floppy Retainer Dogs
- Oil Heater
- Weather Proof Package

DIM. (in./mm)

- A. 53.5/1359
- B. 94/2388
- C. 47/1194
- D. 169.5/4305
- E. 96/2438

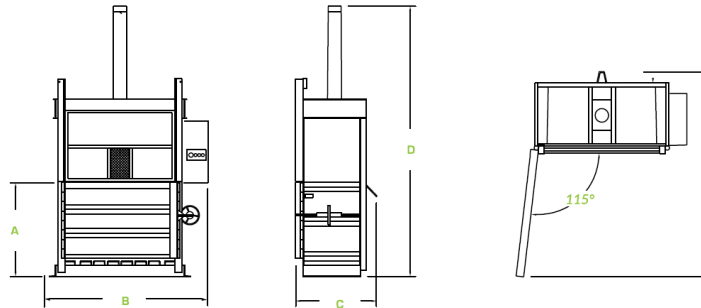

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only. Compactors Inc. equipment is ETL/CSA certified with UL listed controls and meets or exceeds ANSI standard Z245.5.