

VERTICAL BALER

MODEL VMAXX45

This heavy-duty baler delivers greater compact force while still only taking minimal space. Designed for use in retail stores, manufacturing plants, warehouses, distribution centers or any location producing refuse paper, plastic and non-ferrous metals.

PERFORMANCE

- **Nominal Bale Size** – 60" x 30" x 48"
- **Bale Weight** – 1100 to 1400 lbs. OCC
- **Bale Volume** – 50 cu. ft.
- **Number of Bale Tie Slots** – 5 (14' by 12 GA.)
- **Feed Opening** – 26"
- **Compact Force lbs. – Normal/Maximum** – 150,798 / 165,878
- **Platen Pressure** – 87 PSI
- **Average Cycle Time** – 55 Seconds (33.4 sec with optional regen)
- **Loading Height** – 54.5"
- **Full Bale Switch/Light** - Standard




HYDRAULIC/ELECTRICAL

- **Motor HP** – 10 Submersible
- **Voltage 3 Phase** – 208, 230, 480
- **Full Load Amps** – 32A, 28A, 14A
- **Dual Pump GPM** – 14/4 Dual
- **Normal System Pressure PSI** – 3000
- **Maximum System Pressure PSI** – 3300
- **Cylinder Bore** – 8" x 48"
- **Hydraulic Tank-Capacity Gallons** – 38 (60 gallons with optional regen)

AVAILABLE OPTIONS

- IntelliBALE System™ (patent pending)
- Regen circuitry
- Wire guides (allows for front bale tie-off)
- Oil heater
- Weather proof package

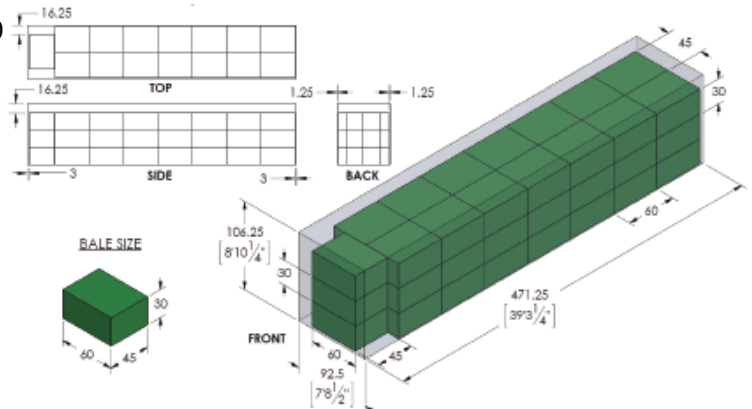

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only. Compactors Inc. equipment is ETL/CSA certified with UL listed controls and meets or exceeds ANSI standard Z245.5.