

VERTICAL BALER

MODEL V63HD

One of our most popular 60" vertical-downstroke units, this high-density baler produces up to 1,100 lbs. of OCC. This is a multi-material machine capable of baling paper, plastic, fiber, OCC and Non-Ferrous metals and other commercial applications.

Ideal for: • Grocery Stores • Home Retailers • Pharmacies • Big Box Retailers • National Accounts • Commissaries • Warehouses • Distribution Centers • Hospitals, Schools & Universities • Recyclers

PERFORMANCE

- **Nominal Bale Size** – 60" x 30" x 48"
- **Bale Weight** – Up to 1100 lbs. OCC
- **Bale Volume** – 50 cu. ft.
- **Number of Bale Tie Slots** – 5
- **Compact Force lbs. Normal / Maximum** – 62,202 / 67,857
- **Platen Pressure** – 35 PSI
- **Average Cycle Time** – 49 Seconds
- **Loading Height** – 54.5"
- **Ejector System** – Semi-Automatic
- **Full Bale Switch** - Standard



HYDRAULIC/ELECTRICAL


- **Motor** – 10HP
- **Voltage 3 Phase** – 208, 230, 480
- **Full Load Amps** – 32A, 28A, 14A
- **Pump GPM** – 12 HiLo
- **Normal System Pressure PSI** – 2200
- **Max. System Pressure PSI** – 2400
- **Cylinder Bore** – 6" x 48"
- **Hydraulic Tank-Capacity Gallons** - 22

AVAILABLE OPTIONS

- Slotted Front Door
- Wire Guides (allows for front bale tie-off)
- Rear Feed Opening, Front Eject
- Feed Chute
- Counter Weighted Floppy Retainer Dogs
- Oil Heater
- Weather Proof Package

DIM. (in./mm)

- A. 54.5/1384
- B. 88.7/2254
- C. 45.5/1154
- D. 145.1/3686
- E. 97.7/2481

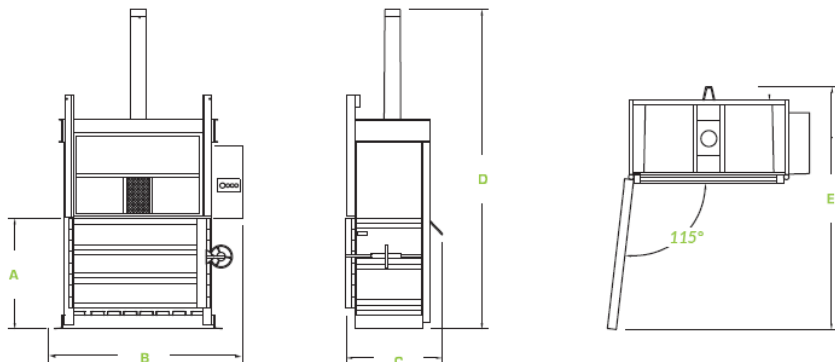

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only. Compactors Inc. equipment is ETL/CSA certified with UL listed controls and meets or exceeds ANSI standard Z245.5.