

## VERTICAL BALER

### MODEL V63XHD

This baler is full of features the others can't touch. It's 7" cylinder with a 60" stroke makes it the unit of choice for numerous recycling and distribution centers with high volumes or tough materials. It outperforms all comparable balers and is considered by many to be the best value in the industry. This heavy-duty baler delivers greater compact force while still only taking minimal space.

**Ideal for:** • Grocery Stores • Home Retailers • Pharmacies • Big Box Retailers • National Accounts • Commissaries • Warehouses • Distribution Centers • Hospitals, Schools & Universities • Recyclers

## PERFORMANCE

- **Nominal Bale Size** – 60" x 30" x 48"
- **Bale Weight** – Up to 1300 lbs. OCC
- **Bale Volume** – 50 cu. ft.
- **Number of Bale Tie Slots** – 5
- **Compact Force lbs.** – 84,667
- **Average Cycle Time** – 70 Seconds
- **Loading Height** – 49.5"
- **Full Bale Switch** - Standard



## HYDRAULIC/ELECTRICAL


- **Motor HP** – 10 HP Submersible
- **Voltage 3 Phase** – 208, 230, 480
- **Full Load Amps** – 32A, 28A, 14A
- **Pump GPM** – 14/4
- **Normal System Pressure PSI** – 2200
- **Cylinder Bore x Stroke** – 7" x 60"
- **Hydraulic Reservoir Capacity** – 40 gal

## AVAILABLE OPTIONS

- Slotted Front Door
- Wire Guides (allows for front bale tie-off)
- Rear Feed Opening, Front Eject
- Feed Chute
- Counter Weighted Floppy Retainer Dogs
- Oil Heater
- Weather Proof Package

DIM. (in./mm)

- A. 49.5/1257
- B. 91.5/2324
- C. 43/1143
- D. 156/3975
- E. 98/2489

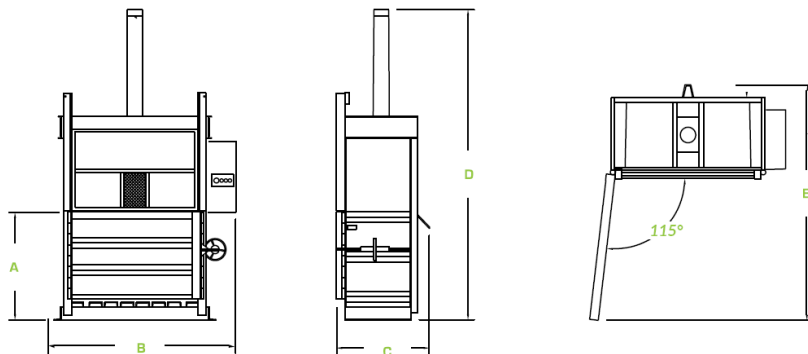

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only. Compactors Inc. equipment is ETL/CSA certified with UL listed controls and meets or exceeds ANSI standard Z245.5.