

PLASTIC PERFORATOR DENSIFIERS

REM® HV-PERF

With a processing capacity of up to 20,000 containers per hour, the Model HV Perf Baler feed is the full beverage destruction equipment you've been waiting for. Designed to fill the need for a very high volume full beverage destruction system with the added benefit of absolutely no handling of the destroyed product by your in-plant labor.


The HV Perf Baler feed system is a completely self contained, low RPM perforating system. This equipment will save you valuable man-hours by automating the tedious chore of manually handling your waste product. Product is fed via an infeed conveyor or hydraulic lift up into the perforator-crushing unit, which is completely sealed inside a gasketed housing.

The perforator-crushing unit discharges the destroyed containers into the inclined auger conveyor, which is equipped with a perforated trough to allow liquid to drain from the destroyed product prior to discharge into the baler. An operator controlled rinse system is standard to dilute residual beverage fluids inside the unit and to prevent product build-up in the system.



STANDARD PRODUCT FEATURES

- Galvanized interior finish
- Perforator speed: 35 RPM
- Perforator horsepower: 10 HP
- Incline auger speed: 31 RPM
- Incline auger horsepower: 5 HP
- Sealed perforator housing
- Rinse system
- Inverter duty motors
- Automated Lubrication system

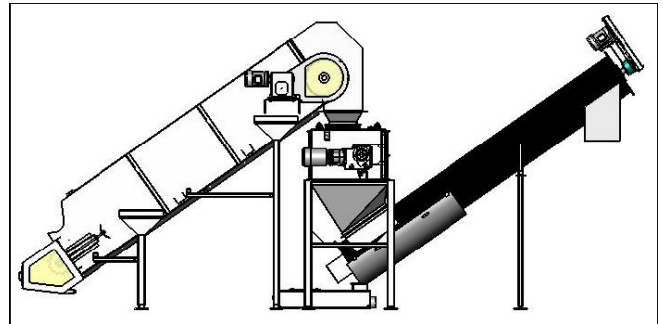

Shown with optional feed conveyor

ELECTRICAL SAFETY FEATURES

- 240/480 volt, three phase
- Electrical components are UL listed
- NEMA-4 (hose proof) enclosure
- Motor overload/short circuit protection

OPTIONS

- Container tipper
- Automatic tipper operation
- Full safety interlocked cage
- Collection drain
- Collection drain with pump
- Full Hopper cover
- Full Conveyor cover
- UL/CUL listed control panel

SPECIFICATIONS

- Max. Discharge Height - 8'
- Length - 30' 21/2"
- Width - 7' 8"
- Hopper load height - TBD
- Hopper Width - Variable
- Hopper Capacity (up to) - 2 cu. yd.

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only.