

VERTICAL BALER

MODEL V630CC

One of our most popular machines, this 60" Vertical Downstroke Baler is ideally suited for OCC & shrink-wrap, producing bales up to 1,000 lbs. The V630CC baler is configured for generating mill size, marketable bales of corrugated materials (OCC) while controlling equipment cost.

Ideal For: • Grocery Stores • Home Retailers • Big Box Retailers • National Accounts • Commissaries • Warehouses • Distribution Centers • Hospitals, Schools & Universities

PERFORMANCE

- **Nominal Bale Size** – 60" x 30" x 48"
- **Bale Weight** – Up to 1000 lbs. OCC
- **Bale Volume** – 50 cu. ft.
- **Number of Bale Tie Slots** – 5
- **Compact Force lbs.** – 56,548/62,172
- **Platen Pressure** – 32 PSI
- **Average Cycle Time** – 49 Seconds
- **Loading Height** – 54.5"
- **Ejector System** – Semi-Automatic



HYDRAULIC/ELECTRICAL


- **Motor** – 10HP
- **Voltage** - 3 Phase, 208V, 230V, 480V
- **Full Load Amps** - 30A, 28A, 14A
- **Pump GPM** - 10.5
- **Factory Set System Pressure PSI** – 2000/2200
- **Cylinder Bore x Stroke** - 6"x 42"
- **Hydraulic Tank-Capacity Gallons** - 22

AVAILABLE OPTIONS

- Slotted Front Door
- Wire Guides (allows for front bale tie-off)
- Rear Feed Opening, Front Eject
- Feed Chute
- Counter Weighted Floppy Retainer Dogs
- Oil Heater
- Weather Proof Package

DIM. (in./mm)

- A. 54.50/1384
- B. 88/2235
- C. 45.5/1154
- D. 139/3530
- E. 97/2481

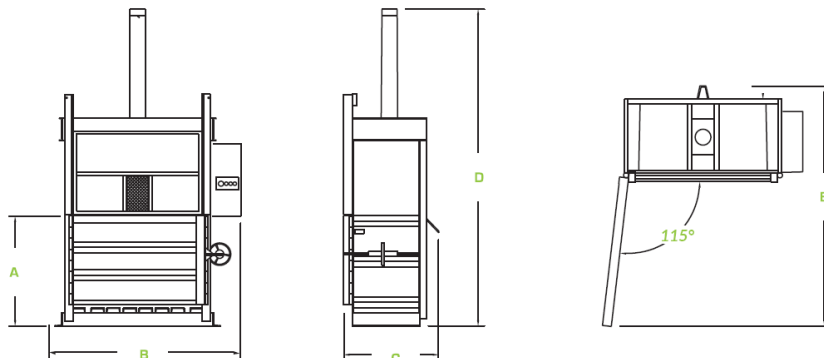

Due to continual product improvement Compactors Inc. reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only. Compactors Inc. equipment is ETL/CSA certified with UL listed controls and meets or exceeds ANSI standard Z245.5.